


## USER INSTRUCTIONS

### Reaming machine chip guard AKS-308-

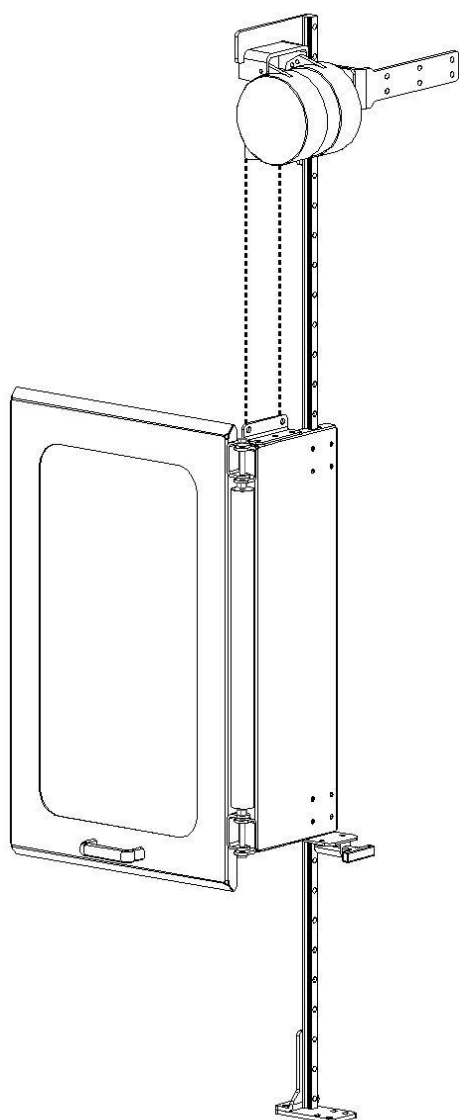

#### Uses

The protector has the purpose of shielding the user from reaming machine shavings.

#### Dimensions

The protector plate is 550 x 940 mm in size. It has a PC-plate window, and the window opening is 400 x 750 mm in size. The protector's upright rail is more or less the same length as the reaming machine's upright guide. The protector's total mass depends on the height of the reaming machine.

#### Installation

The user himself can install the protector onto the top or bottom corner of the machine assembly or by means of a fastening console onto the side of the machine unit. M12 and M10 screws are needed when fastening the protector. When placing the protector, sufficient room must be left for the protector plate movement. Ensure that the protector does not prevent the machine assembly from being raised to its top position. If unclear on any aspect of this, please contact the manufacturer.

#### Operation

The protector plate can be turned to the desired position by means of the joint structure. The height adjustment of the protector plate is done by pulling on the T handle. Releasing the handle locks the protector plate at the desired height.

#### Inspection and maintenance

The protector plate should be kept clean in order to maintain good visibility. If severely scratched or cracked, the protector plate's PC plate must be replaced with a new one. Microfibre cloths and mild dishwashing detergent should be used when wiping a PC plate. If the protector plate has been dented, e.g. the levers are bent or the lightening device is broken, the broken parts must be replaced with new parts.

The warranty period is two (2) years from the date of purchase; the PC plate is not covered by the warranty.

Keuruun FinnSafety Oy

## **EC Declaration of conformity for machinery**

(Machinery Directive 2006/42/EC, Annex II., sub. A)

## **EY-vaatimustenmukaisuusvakuutus koneesta**

(Konedirektiivi 2006/42/EY, Liite II A)

## **EG-försäkran om maskinens överensstämmelse**

(Maskindirektivet 2006/42/EG, bilaga 2, A)

Manufacturer / Valmistaja / Tillverkare: Keuruun FinnSafety Oy

Address / Osoite / Adress : Pl 39, FI-42701 Keuruu

Name and address of the person authorised to compile the technical file:

Henkilön nimi ja osoite, joka on valtuutettu kokoamaan teknisen tiedoston:

Namn och adress till den person som är behörig att ställa samman den tekniska dokumentationen:

Name / Nimi / Namn: Mika Hetekorpi Address / osoite / Adress: Paljekuja 4 FI-42107 Keuruu

Herewith we declare that safety component

Vakuuttaa, että turvakomponentti

Försäkrar härmed att säkerhets komponent

FinnSafetySystem GUARD	AKS-308	SN 0001400 – SN 0001999
FinnSafetySystem GUARD	AKS-308	SN 0001400 – SN 0001999
FinnSafetySystem GUARD	AKS-308	SN 0001400 – SN 0001999

- Is in conformity with the relevant provisions of the Machinery Directive (2006/42/EC)
- on konedirektiivin (2006/42/EY) asiaankuuluvien säännösten mukainen
- Har följande grundläggande krav i maskindirektivet (2006/42/EC) tillämpats och fullföljts


And are manufactured according standard: Guards SFS-EN ISO 14120

Ja on valmistettu standardin Guards SFS-EN ISO 14120mukaan

Vi försäkrar dessutom att standard Guards SFS-EN ISO 14120 har använts

Place,date / Paikka, aika / Ort och datum: Keuruu 01.01.2016

Signature / allekirjoitus / Signatur:



Mika Hetekorpi

Managing Director / toimitusjohtaja / VD