


USER INSTRUCTIONS

Radial drilling machine chip guard SKS-214-

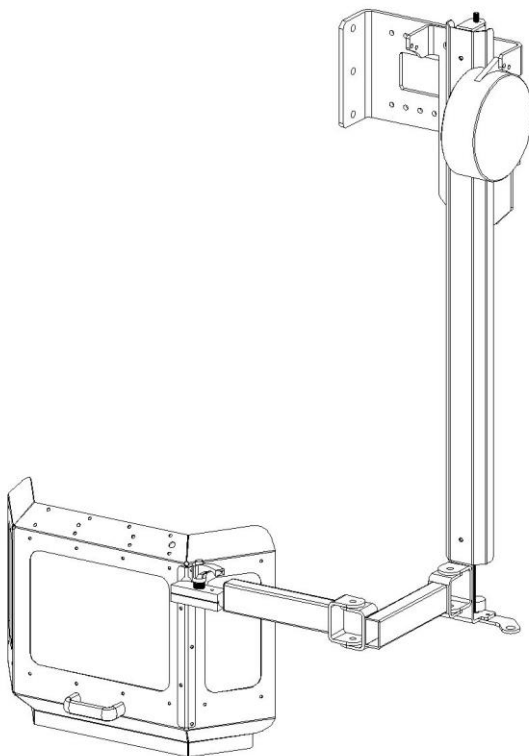

Uses

The protector has the purpose of shielding the user from radial drilling machine shavings.

Dimensions

The protector plate is 550 x 355 mm in size. The protector plate has 3 PC-plate windows. Their sizes are as follows: 270 x 200 mm (1 window) and 200 x 100 mm (2 windows).

The horizontal arms' joint intervals are 330 mm and 220 mm starting from protective enclosure. The length of the vertical movement's linear rail is 1000 mm, and this enables a vertical movement of 660 mm. The protector has a total mass of approx. 21 kg.

Installation

The user himself can install the protector on the side of the radial drilling machine's gearbox. M10 screws are needed when fastening the protector. The fastening console includes a notched adjustment of approx. 140 mm. When placing the protector, sufficient room must be left for the protector plate movement. If unclear on any aspect of this, please contact the manufacturer.

Operation

The ball-and-joint attachment enables the protector plate to be turned to the desired position. The height adjustment of the protector plate is done by moving the upright rail. The rail is self-locking at intervals of 60 mm. Sideways positioning is done by gripping the protector plate.

Inspection and maintenance

The protector plate should be kept clean in order to maintain good visibility. If severely scratched or cracked, the protector plate's PC-plate must be replaced with a new one. Microfibre cloths and mild dishwashing detergent should be used when wiping a PC plate. If the protector plate has been dented, e.g. the levers are bent or the lightening device is broken, the broken parts must be replaced with new parts.

The warranty period is two (2) years from the date of purchase; the PC-plates are not covered by the warranty.

Keuruun FinnSafety Oy

EC Declaration of conformity for machinery

(Machinery Directive 2006/42/EC, Annex II., sub. A)

EY-vaatimusten mukaisuusvakuutus koneesta

(Konedirektiivi 2006/42/EY, Liite II A)

EG-försäkran om maskinens överensstämmelse

(Maskindirektivet 2006/42/EG, bilaga 2, A)

Manufacturer / Valmistaja / Tillverkare: Keuruun FinnSafety Oy

Address / Osoite / Adress : PI 39, FI-42701 Keuruu

Name and address of the person authorised to compile the technical file:

Henkilön nimi ja osoite, joka on valtuutettu kokoamaan teknisen tiedoston:

Namn och adress till den person som är behörig att ställa samman den tekniska dokumentationen:

Name / Nimi / Namn: Mika Hetekorpi Address / osoite / Adress: Paljekuja 4 FI-42107 Keuruu

Herewith we declare that safety component

Vakuuttaa, että turvakomponentti

Försäkrar härmed att säkerhets komponent

FinnSafetySystem GUARD

SKS-214-

SN 0001400 – SN 0001999

FinnSafetySystem GUARD

SKS-214-

SN 0001400 – SN 0001999

FinnSafetySystem GUARD

SKS-214-

SN 0001400 – SN 0001999

- Is in conformity with the relevant provisions of the Machinery Directive (2006/42/EC)
- on konedirektiivin (2006/42/EY) asiaankuuluvien säännösten mukainen
- Har följande grundläggande krav i maskindirektivet (2006/42/EC) tillämpats och fullföljts


And are manufactured according standard: Guards SFS-EN ISO 14120

Ja on valmistettu standardin Guards SFS-EN ISO 14120 mukaan

Vi försäkrar dessutom att standard Guards SFS-EN ISO 14120 har använts

Place, date / Paikka, aika / Ort och datum: Keuruu 01.01.2016

Signature / allekirjoitus / Signatur:



Mika Hetekorpi

Managing Director / toimitusjohtaja / VD